

# Vision

for Professional Eyes

2.5" to 19" Rack Mount LCDs



# 19" Rack Mount Serials

## 2.5" LRM-2521

2.5" Video Rack Mount Serials Monitor x 10 screens.



### | Features |

- LED backlight low power consumption
- NTSC/PAL Auto Recognition
- High resolution 900 x 240 digital 2.5" LCD display
- With BNC connector on screen rear side
- Can rotate side brackets to adjust the required Viewing angle

## 4" LRM-4521

4" Video Rack Mount Serials Monitor x 4 screens.



### | Features |

- LED backlight low power consumption
- NTSC/PAL Auto Recognition
- Adjust brightness and contrast
- With BNC connector on screen rear side
- Can rotate side brackets to adjust the required Viewing angle

## 5.6" LRM-6521

5.6" Video Rack Mount Serials Monitor x 3 screens.



### | Features |

- Blue screen when signal not present
- NTSC/PAL Auto Recognition
- With BNC connector on rear side
- Ultra-Compact: only 2U
- 500 cd/m<sup>2</sup> brightness modification
- Can rotate side brackets to adjust the required Viewing angle

## 7" LRM-7521

7" Video Rack Mount Serials Monitor x 2 screens.



### | Features |

- With BNC connector on rear side
- NTSC/PAL Auto Recognition
- Fit in 4U for 19" rack space
- switch 16:9 to 4:3 of format
- switch non-linear or linear of screen
- Can rotate side brackets to adjust the required Viewing angle

## 8" LRM-8521

8" SVGA + Video Rack Mount Serials Monitor x 2 screens.



### | Features |


- NTSC/PAL Auto Recognition
- Fit in 19" rack for 5U space
- Connect the video source to the Video or PC Inputs.
- With RCA connector on rear side
- Can rotate side brackets to adjust the required Viewing angle

# Monitor

Made in Taiwan Rack Mount Serials Monitor are pretty much engaged in Multifunction LCD display for diverse applications , Broadcasting, Industrial, Security and CCTV fields.

## LRM-1022

10.4" SVGA + 4" x 2 screens Rack Mount Serials Monitor

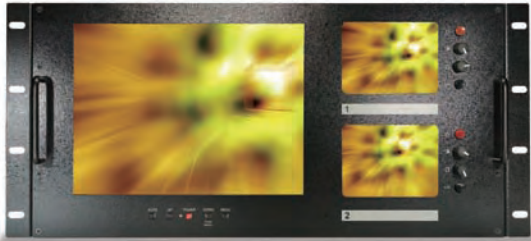

### | Features |

#### 10.4" screen :

- NTSC/PAL Auto Recognition
- Fit in 5U rack space
- Connect the video source to the Video or PC Inputs.
- With RCA connector on rear side

#### 4" screen :

- LED backlight for low power consumption
- NTSC/PAL Auto Recognition
- Adjust brightness and contrast

10.4"  
with  
4"

## LRM-1010

10.4" Rack Mount LCD Monitor



### | Features |

- NTSC/PAL Auto Recognition
- Fit in 19" rack for 5U space
- Connect the video source to the Video or PC Inputs.
- With RCA connector on rear side
- Can rotate side brackets to adjust the required Viewing angle

10.4"

## LRM-1510

15" Video + XGA Rack Mount LCD Monitor



### | Features |

- NTSC/PAL Auto Recognition
- Contrast 400:1
- Fit in 19" rack for 5U space
- Connect the video source to the Video or PC Inputs.
- With RCA connector on rear side
- Can rotate side brackets to adjust the required Viewing angle

15"

## LRM-1910

19" Video + SXGA Rack Mount LCD Monitor



### | Features |

- NTSC/PAL Auto Recognition
- Fit in 19" rack for 5U space
- VESA 75 mounts for wall
- Connect the video source to the Video or PC Inputs.
- With RCA connector on rear side
- Can rotate side brackets to adjust the required Viewing angle

19"

# 19" Rack Mount Serials

	Model No.	LRM-2521	LRM-4521	LRM-6521	LRM-7521	LRM-8521	LRM-1010	LRM-1022	LRM-1510	LRM-1910
Display Size	Inch	2.5"	4"	5.6"	7"	8"	10.4"	10.4" / 4"	15"	19"
Active Area	(W)X(H) (mm)	50.40 X 37.80	82.1 X 61.8	113.3 X 84.7	154.08 X 86.58	162.00 X 121.50	211.20 X 58.40	10.4": 211.20 X 58.40 4": 82.1 X 61.8	304.13 X 228.10	376.32 X 301.06
Dimension	(L)X(D)X(H)(mm)	489.00 X 131.82 X 36.00	489.00 X 87.88 X 61.00	489.00 X 131.82 X 66.00	489.00 X 131.82 X 36.00	489.0 X 220.00 X 51.0	489.0 X 220.00 X 51.0	489.0 X 220.00 X 51.0	483.00 X 310.00 X 52.00	483.00 X 399.00 X 52.00
Resolution	(pixel)	960 X 240	480 X 234	960 X 234	1440 X 234	800 X 600	800 X 600	10.4": 800 X 600 4": 480 X 234	1024 X 768	1280 X 1024
Brightness	cd/m <sup>2</sup>	230	250	500	500	350	230	10.4": 230 4": 250	250	300
Input Signal Video Composite:	1 Vp-p. 75 ohms X 1	√					√	√	√	√
	1 Vp-p. 75 ohms X 2		√	√	√	√		√		
	S-Video socket X 1					√	√	√	√	√
	RGB: 15 Pin D-Sub					√	√	√	√	√
Control Function	Power On / Off	√	√	√	√	√	√	√	√	√
Response Time	(ms)	15	15	15	12	10	10	10	12	5
Video System	NTSC & PAL Dual System	√	√	√	√	√	√	√	√	√
Power Source	AC \ DC Adapter 12V DC	√	√	√	√	√	√	√	√	√
Weight	Kgs	2.5	2.5	2	2	3	2	3.5	6	10



**Opto Vision France Importateur** exclusif  
Tel: 00 33 (0)5 61 76 51 11 Fax: 886-2-8226-1913

Web: [www.optovision.fr](http://www.optovision.fr)

E-mail: [info@optovision.fr](mailto:info@optovision.fr)