



HIKVISION

DS-2CE5AD0T-VPIT3F 2 MP Vandal Proof VF Dome Camera



Key Features

- 2 megapixel high performance COMS
- 1920 × 1080 resolution
- 2.8 mm to 12 mm vari-focal lens
- EXIR 2.0, smart IR, up to 40 m IR distance
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67, IK10
- Up the coax (HIKVISION-C)



www.hikvision.com


Specifications

Camera	
Image Sensor	2.0 megapixel progressive scan CMOS
Signal System	PAL/NTSC
Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps
Resolution	1920 (H) × 1080 (V)
Min. illumination	Color: 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Lens	2.8 mm to 12 mm vari-focal lens
Horizontal Field of View	102.25 ° to 32 °
Lens Mount	Φ14
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 355°, Tilt: 0° to 70°, Rotation: 0° to 355°
Synchronization	Internal synchronization
Menu	
AGC	Low/middle/high
Day/Night Mode	Smart/color/BW(Black and White)
Backlight Compensation	Yes
DWDR	Yes
Language	English, Chinese
Functions	Brightness, Sharpness, DNR, Mirror
Interface	
Video Output	1 HD analog output
Switch Button	TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity 90% or less (non-condensation)
Power Supply	12 VDC ±25%
Power Consumption	Max. 4 W
Protection Level	IP67, IK10
Material	Metal
IR Range	Up to 40 m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	∅ 141 mm × 99.9 mm (∅ 5.55" × 3.93")
Weight	Approx. 800 g (1.76 lb.)

Order Models

DS-2CE5AD0T-VPIT3F

Dimension

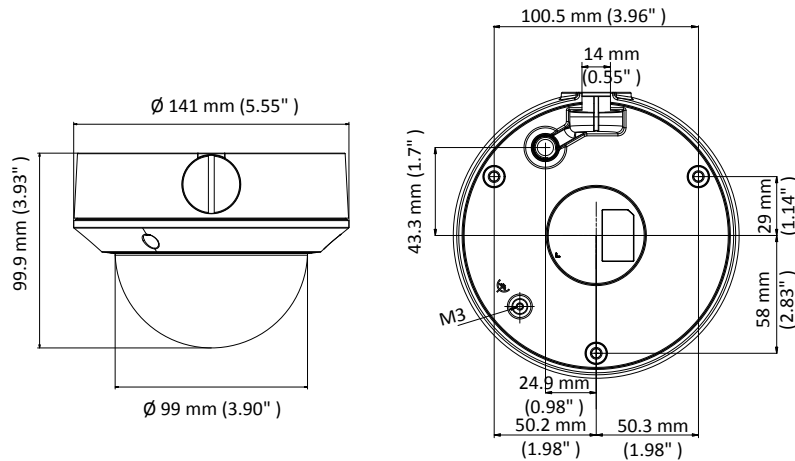

Accessory



DS-1273ZJ-135
Wall Mount



DS-1275ZJ-SUS
Vertical Pole Mount



DS-1276ZJ-SUS
Corner Mount



DS-1271ZJ-135
Pendant Mount



DS-1273ZJ-135B
Wall Mount



DS-1280ZJ-DM21
In-ceiling Mount



DS-1281ZJ-DM23
Inclined Ceiling Mount

Distributed by