


COMPLETE PROTECTION
WITH SUPERIOR DESIGN INSIDE & OUT
HIKVISION EXPLOSION-PROOF CAMERAS



HIKVISION

Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Business: overseasbusiness@hikvision.com
Technical Support: support@hikvision.com

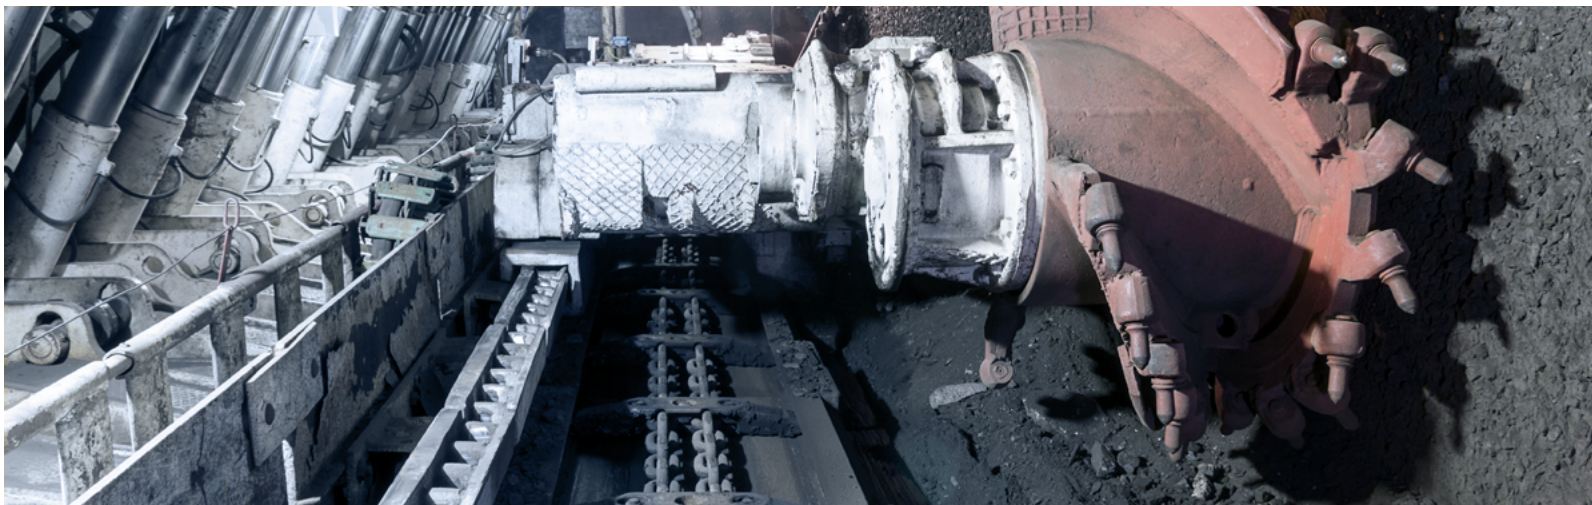

COMPLETE PROTECTION
WITH SUPERIOR DESIGN INSIDE & OUT
HIKVISION EXPLOSION-PROOF CAMERAS

Follow us on social media to get the latest product and solution information


Hikvision HikvisionHQ HikvisionHQ Hikvision_Globa hikvisionhq Hikvision Corporate Channel



HOW TO PREVENT EXPLOSIONS

The Three Elements of Combustion

Explosive substances and combustion-supporting gases are the external factors that explosion-proof product manufacturers can hardly control. However, manufacturers can control the internal factor – the combustion source. And this can be achieved through the structural design and material selection of the product.



Explosive substances
(Combustible gases & solids)



Combustion-supporting gases
(Oxygen)



Combustion source
(Controllable factor: Sparks or flames)


Explosion-Proof Structure

Hikvision explosion-proof cameras use flame-proof housing and a cylindrical flame-proof joint. The adhesive joint guides internal explosive gases to the conduit to prevent combustion from escaping the camera when an explosion happens.

Flame-proof housing

Cylindrical flameproof joint

Adhesive joint face

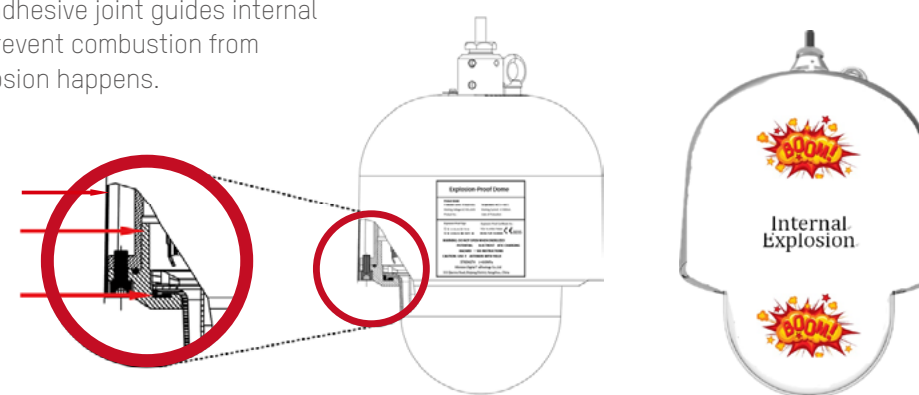

BACKGROUND


With flammable and combustible materials such as gas, oil and powders, places like coal mines, gas stations and chemical plants are prone to explosion risks. In these hazardous places, the design and use of all machinery and electronic equipment must meet the explosive atmospheres regulations to make sure they will not cause explosion.

When it comes to video security in explosion-prone areas, specially-designed explosion-proof cameras is the solution.



Explosion-Proof Materials

Hikvision explosion-proof cameras are covered by 304/316L stainless steel, and the thickness of the cover is more than 3.5 mm. Using ANSYS for finite element force analysis, the structure can withstand a maximum pressure of 198.36 MPa. No broken or permanent deformation results after the simulated explosion.




Hikvision explosion-proof cameras are customized network cameras inside heavy-duty housings. Certified for explosion-prone applications, they offer high-quality video monitoring and unparalleled smart functions to detect anomalies and protect your staff and properties in the hazardous environments.

CERTIFICATION


IECEx Authentication

The IECEx authentication includes 'Gas Explosion-proof' and 'Dust Explosion-proof' certifications.

Gas explosion-proof designations:

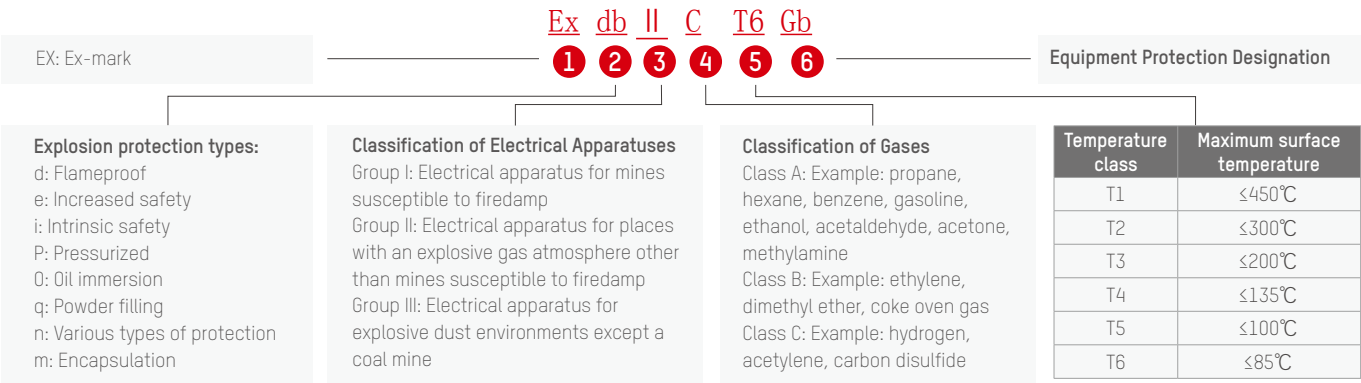


Dust explosion-proof designations:

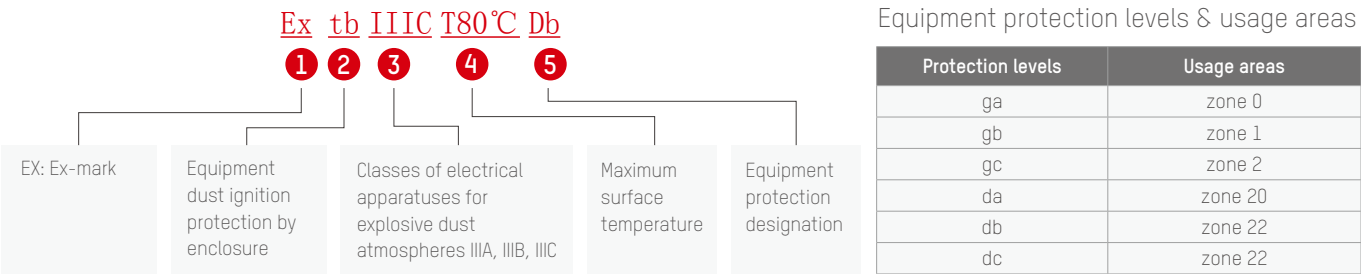

All Hikvision explosion-proof products have acquired the IECEx and ATEX certifications.

IECEx Authentication <ul style="list-style-type: none">Ex db IIC T6 GbEx tb IIIC T80°C Db	ATEX Authentication <ul style="list-style-type: none">II 2 G Ex db IIC T6 GbII 2 D Ex tb IIIC T80°C Db	Mobile Authentication (available for mobile models) <ul style="list-style-type: none">EN50155; EN45545; EMARKAnt-corrosion: C5 (C5-I, C5-M); NEMA 4XCE / FCC / IC / RCM / KC / RoHS / REACH / WEEE / UL (not cUL) / CSA
---	--	--

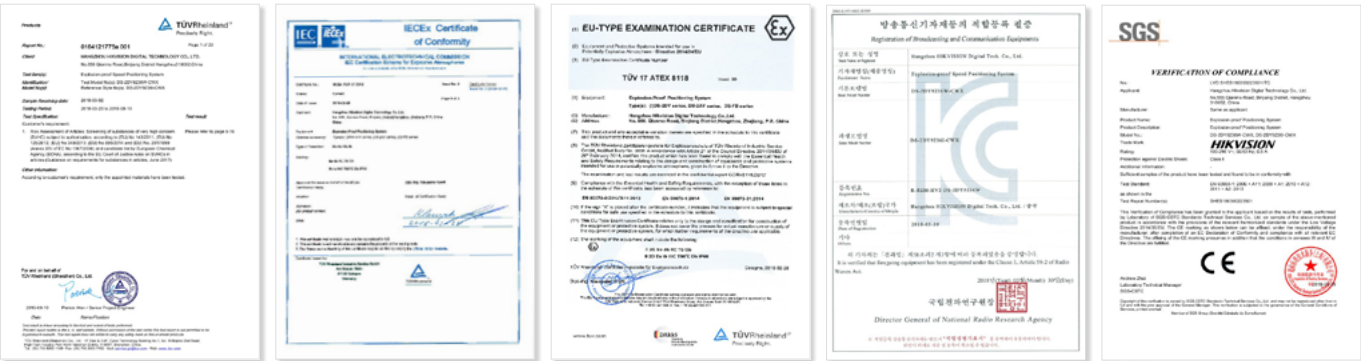

PRODUCT HIGHLIGHTS

Excellent Protection
TVS 6000 V lightning protection



Complete Certification
IECEx, ATEX, NEMA 4X, C5

Deep Learning
Algorithm embedded



Adequate Firmness
IP68, 316L stainless steel

DarkFighter
Low-light imaging



H.265 / H.265+
Excellent encoding that vastly reduces bandwidth and storage

PRODUCT MATRIX

HIGH



DS-2XE6885G0-IZHS
DS-2DF6223-CX(W)
DS-2DY9236I-CWX

MEDIUM



DS-2DB4223ICWX
DS-2DB4236ICWX
DS-2XE6422FWD-IZHRS
DS-2XE6442F-IZHRS
DS-2XE6482F-IZHRS
DS-2XE6222F-IS
DS-2XE6242F-IS
DS-2XE6126FWD-HS

ENTRY



DS-2XE6025G0-I(S)(M)
DS-2XE6045G0-I(S)(M)

Optical zoom	Resolution	IR distance	Others
36x / 23x	2 / 4 / 8 MP	150 meters	304/316L stainless steel body available
23x / 36x / 4x / fixed lens	2 / 4 / 5 MP	200 meters 200 meters 80 meters 150 meters 30 meters	5.9-137.5 mm 5.7-205 mm 2.8-12 and 8-32 mm 2 / 2.8 / 4 / 6 / 8 / 12 / 16 mm lenses available
Fixed lens	2 / 4 MP	30 meters	4 / 6 / 8 mm

PRODUCT SHOWCASE



DS-2DF4220-DX
Network Speed Dome

- 1/2.8" progressive scan CMOS
- 2 MP resolution
- 120 dB WDR
- 3D DNR
- 20x optical zoom; focal length: 4.7 to 94 mm
- 316L stainless steel
- Ø 264.2 mm × 184 mm
- Approx. 8 kg (17.64 lb)



DS-2DF6223-CX(W)
Network Speed Dome

- 1/1.8" progressive scan CMOS
- 2 MP resolution
- 23x optical zoom; focal length: 5.9 to 135.7 mm
- Min. illuminations:
 - Color: 0.005 lux @ (F1.5, AGC ON)
 - B/W: 0.0005 lux @ (F1.5, AGC ON)
- IR cut filter with auto switch
- 3D DNR, low bitrate, 120 dB WDR
- IP68 standard
- Supports three streams simultaneously



DS-2DY9236I-CWX(W/316L)
Positioning System

- 1/1.8" @ 30 fps progressive scan CMOS
- 2 MP resolution
- Min. illumination:
 - Color: 0.002 lux @ (F1.5, AGC ON)
 - B/W: 0.0002 lux @ (F1.5, AGC ON)
 - 0 lux with IR
- 36x optical zoom, 16x digital zoom
- 120 dB WDR, HLC, BLC, 3D DNR, Defog, EIS, Regional Exposure, Regional Focus
- Up to 150 m IR distance




DS-2XE682560-IZ(H)(S)
DS-2XE684560-IZ(H)(S)
DS-2XE688560-IZ(H)(S)
EXIR VF Deep-Learning Bullet

- 1/2.8" progressive scan CMOS
- Up to 8 MP high resolution
- 2.8 to 12 mm or 8 to 32 mm lens
- 120 dB WDR
- Face detection
- Hard hat detection
- ATEX, IECEx, NEMA 4X and C5 certified



DS-2XE6422FWD-IZHRS
DS-2XE6442F-IZHRS
DS-2XE6482F-IZHRS
EXIR VF Bullet

- Up to 8 MP high resolution
- 120 dB WDR
- 2.8 to 12 mm or 8 to 32 mm lens
- 6 behavior analyses, 3 anomaly detections, 1 statistics
- IR up to 150 m (8-32 mm) or 80 m (2.8-12 mm)
- IP68 standard
- 316L stainless steel
- Wiper



DS-2DB4223I-CX(WE/316L)
DS-2DB4236I-CWX(WE/316L)
IR ZOOM Bullet

- 1/1.8" progressive scan CMOS
- 2 MP resolution
- Min. illumination:
 - Color: 0.002 lux @ (F1.5, AGC ON)
 - B/W: 0.0002 lux @ (F1.5, AGC ON)
 - 0 lux with IR
- 23x optical zoom, 12x digital zoom
- Digital WDR, 3D DNR, HLC, BLC
- 85 to 245 VAC & PoE+ (IEEE 802.3at class 4)
- Up to 200 m IR distance



DS-2XE622560-IZS
DS-2XE624560-IZS
DS-2XE6222F-IS
DS-2XE6242F-IS
Fixed Lens Bullet

- Up to 4 MP resolution
- 4 / 6 / 8 / 12 mm lens or 2.8-12 mm lens
- 120 dB WDR
- 6 behavior analyses, 2 anomaly detections, 1 recognition
- Housing material: 316L stainless steel, optional
- IR range: 30 m
- 100 to 240 VAC / PoE
- IP68



DS-2XE6126FWD-HS
DS-2XE6146FWD-HS
Fixed Lens Dome

- 1/2.8" Progressive Scan CMOS
- Up to 4 MP high resolution
- 2 / 2.8 / 4 / 6 mm lens, optional
- 120 dB WDR
- 316L stainless steel
- Image enhancement: BLC, 3D DNR, HLC, Defog, EIS
- Behavior analyses, exception detections and face detection
- IP68



DS-2XE602560-I(S)(M)
DS-2XE604560-I(S)(M)
Fixed Lens Bullet

- 1/2.7" Progressive Scan CMOS
- Up to 4 MP high resolution
- 4 / 6 / 8 mm lens, optional
- 120 dB WDR
- 6 behavior analyses, 2 anomaly detections, 1 recognition
- Housing material: Aluminum
- IR range: 30 m
- 24 VDC / PoE
- IP68 / IK08

APPLICATIONS

Oil & Gas

(From energy extraction to energy consumption)



Dust & Powders

(Manufacturing)



Example – Oil Depots



Area	Recommended Products	
Loading area	Explosion-proof bullet, explosion-proof PTZ	
Tank area	Explosion-proof positioning system, explosion-proof bullet	
Monitoring area	Explosion-proof fixed lens dome	
Office area	HD network cameras	