



## HAC-HDBW2120R-VF

1.4Megapixel 720P Vandal-proof IR HDCVI Dome Camera



### Features


- 1/3" 1.4Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switchable
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 30m, Smart IR
- IP66, IK10, DC12V

# HAC-HDBW2120R-VF

## Technical Specifications

| Model                  | DH-HAC-HDBW2120RP-VF   | DH-HAC-HDBW2120RN-VF |
|------------------------|--|----------------------|
| <b>Camera</b>          |  |                      |
| Image Sensor           | 1/3" 1.4Megapixel CMOS   |                      |
| Effective Pixels       | 1305(H)×1049(V)  |                      |
| Electronic Shutter     | 1/3s~1/100,000s  |                      |
| Video Frame Rate       | 25/50fps@720P  | 30/60fps@720P        |
| Synchronization        | Internal   |                      |
| Min. Illumination      | 0.01Lux@F1.2(AGC ON), 0Lux IR on   |                      |
| Video Output           | 1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch) |                      |
| <b>Camera Features</b> |  |                      |
| Max. IR LEDs Length    | 30m, Smart IR  |                      |
| Day/Night              | Auto(ICR) / Color / B/W  |                      |
| Noise Reduction        | 2D/3D  |                      |
| OSD Menu               | Support  |                      |
| <b>Lens</b>            |  |                      |
| Focal Length           | 2.7~12mm   |                      |
| Angle of View          | H: 90° ~28.7°  |                      |
| Lens Type              | Manual / Fixed Iris  |                      |
| Mount Type             | Φ14  |                      |
| <b>General</b>         |  |                      |
| Power Supply           | DC12V±10%  |                      |
| Power Consumption      | Max 5.8W   |                      |
| Working Environment    | -30°C~+60°C / Less than 95%RH (no condensation)  |                      |
| Transmission Distance  | Over 500m via 75-3 coaxial cable   |                      |
| Ingress Protection     | IP66 & IK10  |                      |
| Dimensions             | Φ122mm×89mm  |                      |
| Weight                 | 0.45kg   |                      |

### Dimensions (mm)

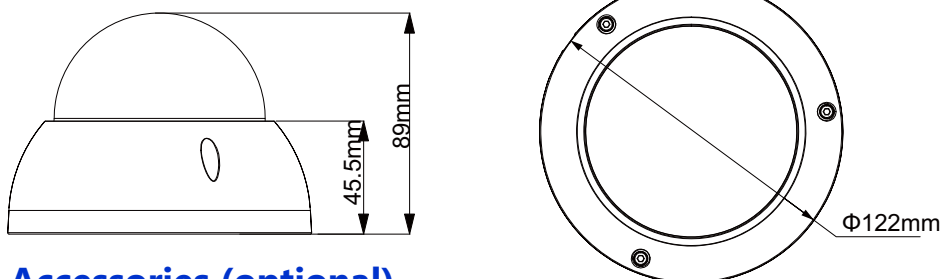

### Accessories (optional)

