



# Professional SDI Monitor




## L215-HSDI




### Feature

- Multi-Function Display
- True 10 bits Color processing engine
- Independent color management(ICM)
- Dynamic contrast control(DCC)
- Metal housing
- Build-in 2W+2W speaker
- VESA standard bracket
- Wall mountable capability

### Monitor Connection

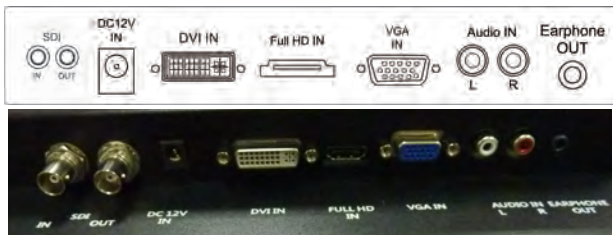

### 2 choices of Stand



Stand A



Stand B

### Specifications

Model	CH-L215-1HDVSB-SDI
LCD panel	21.5"
Visible area (mm)	476.6 x 268.1
Picture format	16 : 9
Max. resolution	1920 x 1080
Pixel dot pitch (mm)	0.248x0.248
Colours	16.7M
Brightness	250 cd/m <sup>2</sup> [LED]
Contrast	1000 :1
Response time(Tr/Tf)	1.3/3.7 ms
View angle (U/D/L/R)	80/80/85/85
Video input /output	1x /1x SDI (HD-SDI and 3G-SDI, BNC Type)
Full HD input	1x Full HD (HDMI A type)
Audio input (R/L)	2x (RCA)
PC input	1x VGA input (D-Sub 15 pin) 1x DVI-D input
Earphone out	1xPhone jack ,3.5ψ
Speaker	2x built-in speaker (2 watt)
SDI standards	3G-SDI[SMPTE 424M] HD-SDI[SMPTM 292M] SD-SDI[SMPTE 259M]
SDI Video support	[3G] 1080P50/60(4:2:2) [HD]720P@50/60Hz,1080i@50/60Hz,1080p25/30Hz [SD]NTSC/60Hz,PAL/50Hz
SDI Video bandwidth	2.97Gpbs&2.975/1.001Gpbs
SDI Cable Transmission	3G-SDI[100Meter],HD-SDI[200Meter],SD-SDI[300Meter] _(5C2V orRG6Cable)
OSD setting	Yes
Power input	AC 100-240V 50/60Hz, Adapter DC 12V/5A
Power consumption	Approx. 24 watt
Dimensions (WxHxD) mm	532.3 x 323.3x 65
Weight	5.7 kg
Protective front glass	Option
Operating temperature	0° to 40° C

Subject to technical changes without prior notice. Error excepted.