



# Immersible - Full HD - Boitier Inox - Zoom x10 - LED IR



VSM-900V550

**4-en-1**

**AHD**  
Analog High Definition


**HDCVI**

**HDCVI** **CVBS**

## FEATURES

- 1/2.8" Sony STARVIS CMOS sensor
- Full HD Mega Pixel (1080P)
- Stainless Steel Body & bracket (AISI 316L grade)
- 4-in-1 (AHD, CVI, TVI, CVBS)
- 6 pcs of Super LEDs
- 5~50mm DC auto iris motorized megapixel lens
- True Day & Night function with ICR mechanism
- 3D DNR (Digital Noise Reduction)
- SENS-UP
- D-WDR (Digital Wide Dynamic Range)
- Live Defect Detection & Correction
- UTC (OSD via coaxial cable)
- Weatherproof 50m / **IP-68** compliant
- DC12V

## DIMENSION

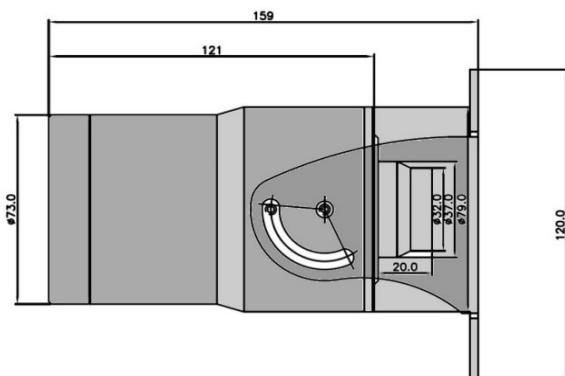

## SPECIFICATIONS

Image Sensor	1/2.8" Sony STARVIS CMOS sensor
Active Pixel	1920(H) x 1080(V)
Resolution	1080p@30fps/1080p@25fps
Min. Illumination	Color : 0.001 lux, (F=1.2) B/W : 0.000Lux (IR ON)
Scanning System	Progressive
Video Output	Universal AHD, CVI, TVI : 1080P, Analog: NTSC/ PAL CVBS
S/N Ratio	More than 50dB (AGC off)
AGC	Off/0 - 15
Shutter Speed	AUTO/MANUAL(1/50(60) ~ 1/50,000 sec)
SENS-UP	Off/X2 - X30
Brightness	0 - 100
Backlight	Off/BLC/HSBLC
D-WDR	Off/0 ~ 8
Defog	Off/Auto
Day & Night	Auto/Color/B&W/EXTERN
White Balance	ATW/AWC/INDDOR/OUTDOOR/Manual/AWB
DNR	Off/Low/Middle/High
Mirror	Off/MIRROR/V-FLIP/ROTATE
Sharpness	0 -10 steps
Privacy Mask	4 Masks
Motion Detection	Off/On
Language OSD	English/Chinese/Germany/French/Italian/ Spanish/Polish/Russian/Portuguese/ Dutch/Turkish/Korean/Japanese
Power Source	DC12V ±10%
Power Consumption	Max 5.0 Watt at IR on
Operating Temperature	-20°C to 60°C
Operating Humidity	10% to 85%
Lens	5~50mm DC auto iris motorized MP lens(ICR)
Dimension/mm	Φ76 X 158.5(W) X 120(H)
Weight/g	Approx. 1520

## CABLE

- Standard length 1 m - Any other length on demand
- Underwater connector on demand

