

X-17P



A brilliant display that delivers advanced design, durability and versatile performance for progressive professional environments.

The X-17P is a highly durable 17" display that will deliver decades of performance. Featuring NeoV™ Optical Glass, built-in video support and multiple input options, the X-17P is well suited to professional public environments. The strong metal casing and VESA compatible wall mounts allow the X-17P to be mounted just about anywhere. The unique look and versatility of the X-17P make it the perfect display solution for any modern environment.

- > NeoV™ Optical Glass
- > AIP technology: PIP; Built-in Image Enhancer
- > Swift 3 ms response time
- > S-Video and CVBS inputs
- > DVI video inputs for high quality signal
- > Built-in speakers (1.5W x 2)
- > EcoSmart Sensor for low watt power consumption
- > Touch sensor control keys to prevent vandalism
- > Auto-adjustment for optimal settings
- > Kensington® security socket
- > VESA standard wall mount
- > Durable metal casing
- > Available colours: black, white
- > Rigorous screening of the components for mission-critical 24/7 applications



NeoV™ Optical Glass - The most trusted hard glass protection available. Only on AG Neovo displays



X-17P

Specifications

X-17P

Panel	Panel Type	LED-Backlit TFT LCD
	Panel Size	17.0" (432 mm)
	Max. Resolution	SXGA 1280 x 1024
	Pixel Pitch	0.264 mm
	Brightness	250 cd/m ² (Typical)
	Contrast Ratio	1000:1 (Typical)
	Viewing Angle (H/V)	170°/160° (Typical)
	Display Colour	16.7M
	Response Time	3 ms (GTG)
Frequency (H/V)		H: 24 kHz - 82 kHz V: 50 Hz - 85 Hz
Input	Analogue	15-Pin D-Sub
	Digital	24-Pin DVI-D
	S-Video	4-Pin Mini DIN
	CVBS	RCA
Audio	Audio In	1 x stereo audio in for PC (audio jack, 3.5 Ø) 1 x stereo audio in for CVBS or S-Video (RCA)
	Speaker	1.5W x 2
Power	Power Supply	External
	Power Requirements	DC 12V
	Consumption	< 19 W (on) < 0.5 W (Stand-by) < 0.5 W (Off)
NeoV™ Optical Glass	Thickness	3.0 mm (0.12")
	Reflection Rate	< 1%
	Transmission Rate	> 96%
	Coating Hardness	> 9H
Plug & Play	VESA	DCC 2B, DCC/CI
Operating Conditions	Temperature	0 °C ~ 40 °C
	Humidity	10% ~ 90%
Storage Conditions	Temperature	-20 °C ~ 60 °C
	Humidity	5% ~ 95%
Mounting	VESA FPMPMI	Yes (100 x 100mm & 75 x 75mm)
Tilt	Tilt	0° ~ +20°
Dimensions	Product (W x H x D)	409 x 398 x 175 mm (16.1" x 15.7" x 6.9")
	Packaging (W x H x D)	486 x 497 x 228 mm (19.1" x 19.6" x 9.0")
Weight	Product Weight	6.1 kg (13.4 lbs)
	Packaged Product Weight	8.5 kg (18.7 lbs)
Regulation Approval	Certifications & Compliance	CB, FCC, CE, WEEE, RoHS, REACH, GOST-R
Accessories	Supplied	CD ROM (user manual), power cord, power adaptor, 15-Pin D-Sub cable, audio cable



Available in black or white




NeoV™ Optical Glass and durable metal casing for water, dust and scratch resistance



Front-panel keypad with Input Select, Screen Menu, Contrast and Brightness controls for quick adjustments



Wide range of I/O connectors for flexibility and expandability in video installations

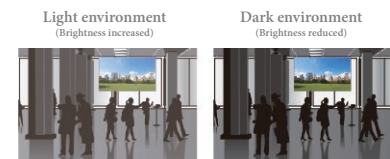

EcoSmart Sensor auto adjusts brightness for ultra low power consumption

