



Professional IP Monitor – IP Series (2.0)


Special Features

- H.264/H.265 compression format
- Support Max.5MP IP camera.
- Graphical and text interfaces (GUI)
- Use Ethernet connection control
- Support HDMI/VGA/DVI-D input
- Supports Max. 16CH network cameras via HUB/Switch
- Supports ONVIF compliance, Real Time Streaming Protocol
- Protectable Metal casing. VESA standard.
- Monitor available with PoE function (Option)


CH-L101-2HDVSB--IP16



Monitor Connection

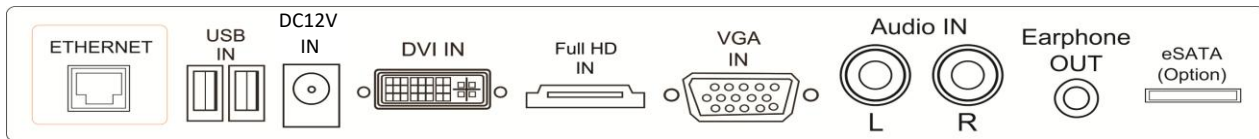

Monitor PoE Application

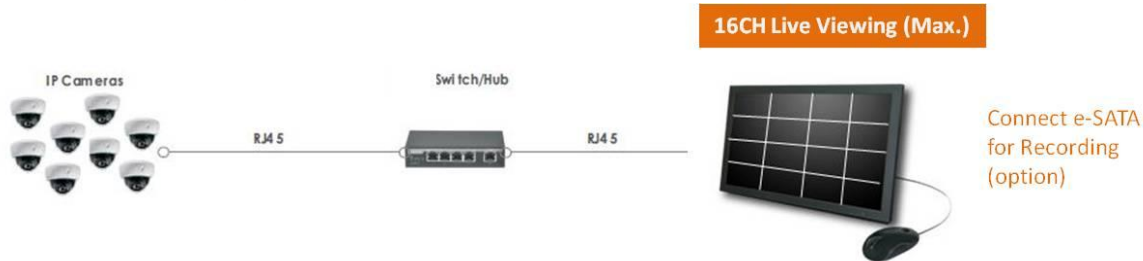

Specifications

Model	CH-L101-2HDVSB-IP16
LCD panel	10.1"
Visible area (mm)	216.96X 135.60
Picture format	16:10
Max. resolution	1280x800
Pixel dot pitch (mm)	0.1695x 0.1695
Colors	16.2M
Brightness	350 cd/m ² [LED]
Contrast	800 :1
Response time(Tr/Tf)	10/15 ms
View angle (U/D/L/R)	85/85/85/85
Full HD input	1x HDMI
Audio input(R/L)	2x (RCA)
PC input	1x VGA input / 1x DVI-D input
Earphone out	1xPhone jack ,3.5ψ
Speaker	2x built-in speaker (2 watt)
IP Video support	Split resolution: 1x(2592*1944)/ 4x(1280*720)/ 8x(720*576)/ 16x(640*480)
Network Port	1x RJ45, 10M/100M
USB Port	2x USB 2.0 ports
Power input	AC 100-240V 50/60Hz, Adapter DC 12V/2A
Power consumption	Approx. 12 watt
Dimensions (WxHxD) mm	255.1x173.6x59.1
Weight	1.7 kg
Operating temperature	0° to 50° C

Subject to technical changes without prior notice. Error excepted.