




→ **CTCM-4101**



→ **Dimension**

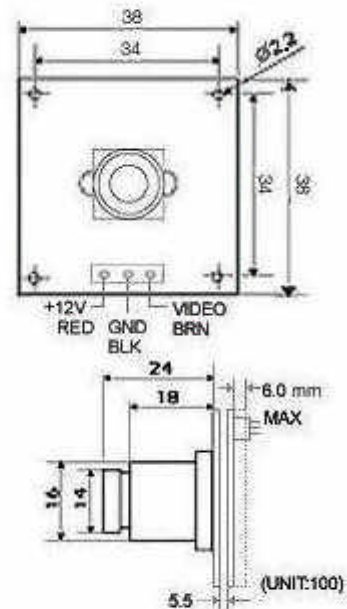

→ **Features**

- Digital Signal Processing
- 0.7 Lux Sensitivity at F1.2
- Various Automatic Function
 - Built-in AGC (Auto Gain Control)
 - ESC (Electronic Shutter Control)
 - Back Light Compensation
 - Audio Function available
 - Fixed, Pin Hole, C/CS Mount

MODEL NO	CTCM - 4101 (NTSC)	CTCM - 4101 (PAL)
Image Sensor	1/3" Interline transfer type color CCD (Sony)	
Effective Pixels	768H × 494V (380K pixels)	752H × 582V (440K pixels)
Scanning System	525 Lines 2:1 Interlace	625 Lines 2:1 Interlace
Scanning Frequency	15.734KHz (H), 59.94Hz (V)	15.625KHz (H), 50Hz (V)
Resolution	470 TV - Lines	
Shutter Speed	1/60 ~ 1/100,000sec.	1/50 ~ 1/100,000sec.
S/N Ratio	More than 48dB (AGC off)	
Sync. System	Internal	
Min. Illumination	0.7 Lux (F1.2)	
White Balance	AWB	
Video Output	VBS 1.0 Vp-p (75Ω Load)	
Power Supply	DC12V (10.5V~15V)	
Power Consumption	160mA (DC12V)	
Operation Temp.	-10°C ~ +50°C	
Operation Humidity	90% RH max	
Weight	Approx. 40g	